

# **Auburn Gear**

Engineered Drive Solutions



Power Wheel

Model 3 TWISTOTOW®

# Power Wheel Model 3 TWISTOTOW®


## Feature Chart: Model 3 TWISTOTOW®

OPTIONS	DESCRIPTION	MAKE ALL SELECTIONS IN ONE COLUMN	ORDER CODES	USE OPTION ORDER CODES TO BUILD ORDER NUMBER
BASE MODEL	Model 3 TwisToTow®	. . . .	3T2	3T2
MOTOR PILOT/HUB	SAE A-4 Bolt Magneto	. . . .	A4F	A4F
	SAE B-2 Bolt	. . . .	BF	
INPUT SPLINE	13T 16/32	. . . .	13	
	14T 12/24	. . . .	14	14
	1" 6B	. . . .	15	
RATIO	3.60:1	. . . .	03	03
SHAFT/SPINDLE OPTIONS	5 thru holes on 4.50" B.C.	. . . .	FD1	FD1
	(6) M14x1.5 thd on 110mm B.C.	. . . .	FD2	
SHAFT STUDS	None	. . . .	00	
	1/2-20 x 1.62"	. . . .	26	26
	9/16-18 x 1.62"	. . . .	27	


Example of complete order code: 3T2 A4F 14 03 FD1 26

## Bearing Life Curve

B10 life is based on 3,000 hours at 100 rpm

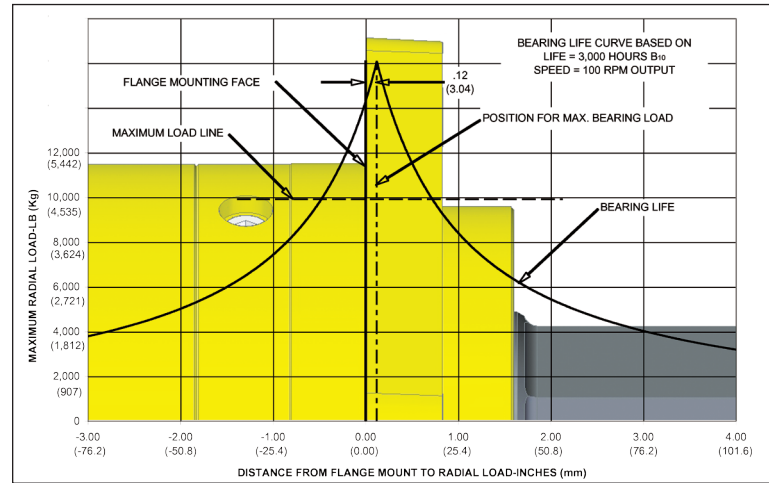

## Model 3 TWISTOTOW®

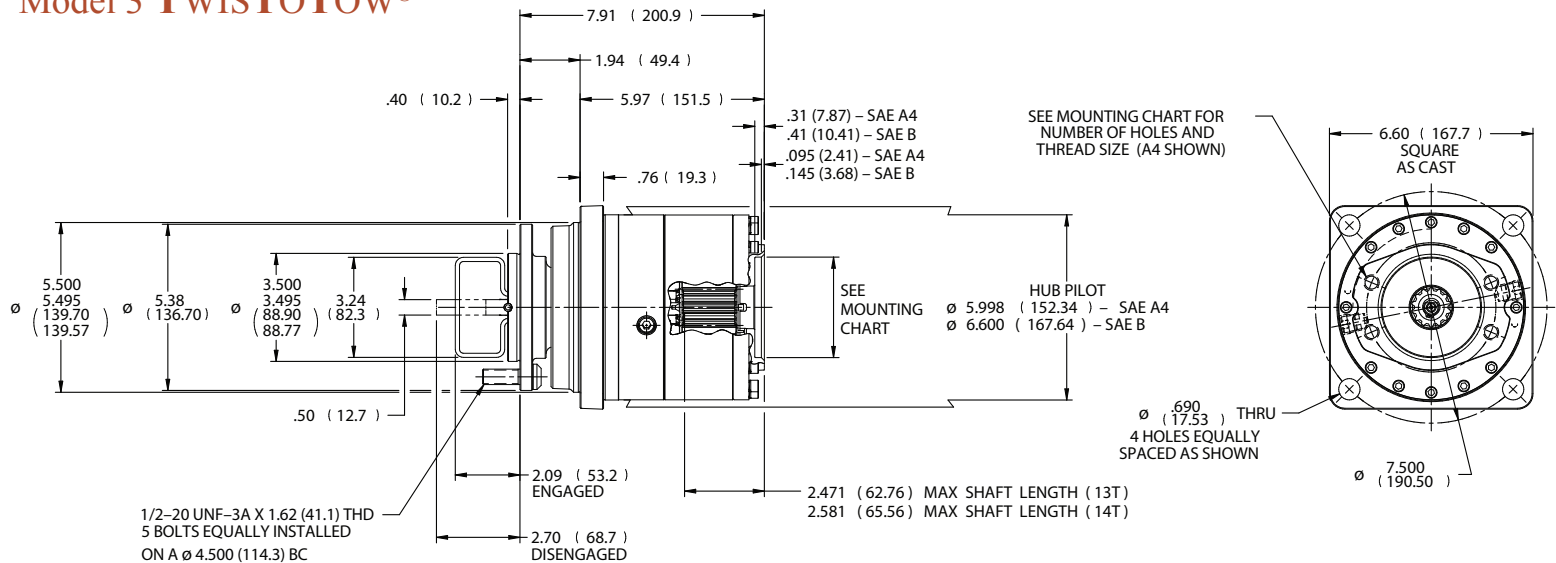

## Motor Mounting Chart

SAE	# of Tapped Holes, Thread Size and Bolt Circle	Pilot Diameter
A4	(4) 1/2"-13 UNC-2B on a 4.187" (106.35mm) B.C.	3.251"-3.256" (82.58-82.70mm)
B	(2) 1/2"-13 UNC-2B on a 5.75" (146.05mm) B.C.	4.001"-4.006" (101.62-101.75mm)